



INDUSTRIAL SERVICE TANKS CATALOGUE



Your customers depend on you. **You can depend on Glendale.**

Overview/History

For over 30 years Glendale Industries has been providing industrial service tanks to businesses across Western Canada. Our expertise in manufacturing truck mounted vacuum septic and potable water tanks ensures you get a superior product. That's why we back every tank with a 2 year parts and labor warranty.

This is achieved by our team of certified tradespeople and using quality parts and components. We know your customers depend on you, so we understand it is important you can depend on us.



VALVES




CAMLOCKS



LEVEL INDICATORS



HOSE

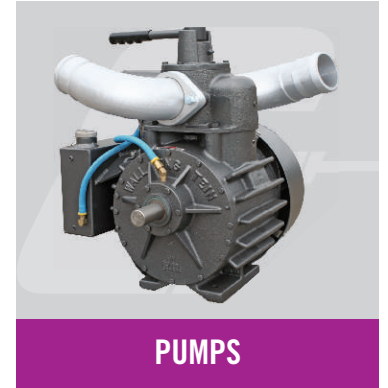

PUMPS

Parts & Service

Glendale Parts & Service supply a wide selection of top quality products from pumps to valves at competitive prices. Combined with a dedicated team with 30 years' experience we have the knowledge and skill to answer any questions you may have in order to help keep your operation running smoothly.

A strong commitment to customer service ensures Glendale customers that they can rely on us to be their one stop for everything they need.



Fire Support Tanker

2800 Gallon Non-Potable Water Delivery System

- 6'-6" by 12ft shell, (1/4" Plate), double welded, inside & out with 1/4" flanged heads
- Siren kit installed
- Tank is baffled (baffles are ribbed and welded solid to tank sides)
- 1-4" top fill spout c/w storz fitting and hose for hydrant filling
- 2-8" level action side dumps for use with chute dump
- DOT LED lighting to comply with Federal Emergency Vehicle Standards, work lights on 3 sides
- Tank exterior sandblasted, epoxy primed and powder painted one color
- 2" Honda gas engine pump c/w electric start
- Custom built aluminum storage cabinets to be mounted driver and passenger side behind cab.

Fire Support Tanker

1600 Gallon Potable Water Delivery Unit

- Tank is baffled (baffles are ribbed and bolted solid to tank sides)
- Passenger side storage cabin
- Tank exterior sandblasted, epoxy primed and powder painted RED
- Driver side pump cabinet – HEATED
- 5ft by 12ft shell (1/4" Plate), double welded, inside & out with 1/4" flanged heads
- 20" top dome c/w overflow pipe
- Drivers side for tool storage, passenger side for pump, bladder, etc.
- Supply & Installation of Emergency Vehicle Lighting package
- Supply Stand Alone Darley pump package
- Full width walkway between cab and tank
- Full length checker plate deck c/w ides



3000 Gallon Vacuum Septic Tank

- 1054 Wallenstein liquid cooled hydraulic pump
- 500 CFM
- 3 Stage telescopic hoist with a stay down deck
- 4" Fill and 6" Dump
- Heated brass valves
- Hendrickson air ride suspension
- Allison automatic transmission

VST

VACUUM SEPTIC TANKS SERIES

The Glendale VST Series is built work ready. Constructed with a thick carbon steel shell, welded seams inside and out and a powder coat finish to combat corrosion, our tanks are built to last. We also offer single and tandem axle options so you can select the tank right for your operation.

Looking for more power, a custom Hydro Excavator or a custom blower?

At Glendale we know every operation is different, so we work with you to build a tank with the right features and functions to make your job easier.



Single Axle VST Standard Pump Features

| Model | Wallenstein 403 Pump (200 CFM) | 3-Way Control Head | Fan-Cooled & Pressure Oiling | PTO Engage Lever c/w Cab Indicator Light | Triple Belt Drive & Guard | Belt Tightener | Double Bearing on Jackshaft | Greaseable Heavy-Duty 12R Series PTO Joints | 3" Oil Catch Muffler |
|----------|--------------------------------|--------------------|------------------------------|--|---------------------------|----------------|-----------------------------|---|----------------------|
| VST 1600 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| VST 2000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Tandem Axle VST Standard Pump Features

| Model | Wallenstein 753 Pump (400 CFM) | 3-Way Control Head | Fan-Cooled & Pressure Oiling | PTO Engage Lever c/w Cab Indicator Light | Triple Belt Drive & Guard | Belt Tightener | Double Bearing on Jackshaft | Greaseable Heavy-Duty 12R Series PTO Joints | 3" Oil Catch Muffler |
|----------|--------------------------------|--------------------|------------------------------|--|---------------------------|----------------|-----------------------------|---|----------------------|
| VST 2700 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| VST 3000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| VST 3600 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Measurements in charts are approximate.


Standard Tank Features:

- 403 Wallenstein Pump (200 CFM)
- Constructed using ¼" thick carbon steel shell
- All seams welded, inside & out
- ¼" flanged & dished heads
- Tank interior sandblasted & lined with plastic liner for corrosion resistance
- Full length, heavy gauge sloped sills for a complete clean out
- Full length checker plate deck with raised side rails
- LED/DOT approved lighting with 2 night service spot lights
(all connections soldered)
- Exterior is sand-blasted, epoxy primed & powder coated standard white for long-term use
- 21" rear access door complete with 6" brass sliding piston valve & handle, camlock coupler & dust cap

- Baffled tank (ribbed & bolted) for load stability
- 3" rear fill valve complete with 3" quick valve, camlock coupler & dust cap
- Rear hose holders & access ladder
- 12" primary shut-off complete with 4" stainless float ball & stainless steel cage
- 4 gallon secondary moisture trap with 4" stainless steel float ball & brass drain valve for pump protection, longer life & trouble free operation
- 1 ½" brass vacuum relief valve
- 2" brass pressure relief valve
- Two 5" rear-mounted Pyrex sight glasses
- Liquid-filled 4" vacuum/pressure gauge
- Back-up alarm system (97 decibels)
- Front & rear mud flaps
- Rear pull hooks

Vacuum Septic Tank Options:

- 750H (350 CFM) Wallenstein pump in lieu of 403
- Pump, Brand & Size options
- Heated 3" & 6" valves
- 3" x 30' TIGERFLEX hoses
- Water wash system c/w 12V, 7 (GPM) water pump and 60 Gal. tank for rinsing
- Liquid cooled pump
- Hydraulic drive
- Hoist Body
- Underbody toolbox (30" W x 24" D x 24" H)
- 4" rear valve in lieu of 3"
- 36" rear door (manual)
- Custom tank powder coat colours

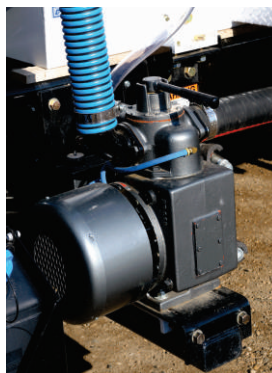

Wallenstein 403 Pump



Pressure Gauge



3" Rear Fill Valve
c/w 3" Camlock Coupler
& Dust Cap



6" Rear Unload Valve
c/w 6" Camlock Coupler
& Dust Cap

Single Axle VST Series Specifications (Without Hoist)

| Model | Tank Capacity | | Tank Diameter | Tank Length | Front Axle Capacity | Rear Axle Capacity | Cab to Axle Length |
|----------|------------------|--------|---------------|-------------|---------------------|--------------------|--------------------|
| | Imperial Gallons | Litres | | | | | |
| VST 1600 | 1,600 | 7,358 | 5' | 12' | 12,000 lbs. | 21,000 lbs. | 120" |
| VST 2000 | 2,000 | 9,022 | 5' 6" | 12' | 12,000 lbs. | 23,000 lbs. | 120" |

Tandem Axle VST Series Specifications (Without Hoist)

| Model | Tank Capacity | | Tank Diameter | Tank Length | Front Axle Capacity | Rear Axle Capacity | Cab to Axle Length |
|----------|------------------|--------|---------------|-------------|---------------------|--------------------|--------------------|
| | Imperial Gallons | Litres | | | | | |
| VST 2700 | 2,700 | 12,429 | 6' | 14' | 14,000 lbs. | 40,000 lbs. | 136" |
| VST 3000 | 3,200 | 14,682 | 6' | 16' | 16,000 lbs. | 40,000 lbs. | 154" |
| VST 3600 | 3,600 | 16,560 | 6' 6" | 16' | 20,000 lbs. | 40,000 lbs. | 154" |

Measurements in charts are approximate.

PWT

POTABLE WATER TANKS SERIES

Built work ready, the Glendale PWT Series is equipped with food grade tank liners and hose. Add to that a powder coat finish to combat corrosion and you've got a tank built to last. Models come in single and tandem axle options.

Looking for a tank with a little more power or a few extra options?

Glendale can build a tank to your required specifications. Our team has over 25 years of experience in the industry and there is no job too big or small. Ask us today how we can build your custom tank.



Single Axle PWT Standard Pump Features

| Model | Mid-ship Mounted Cabinet c/w Pump, Reel & Hose & Right & Left Doors | 135 GPM Hydraulic Driven, Centrifugal Pump | 1 ½" Flexible Potable Water Hose c/w Full Flow Nozzle (100ft. length) | Electric Rewind Hose Reel c/w Brake | 1000 Watt, 110 Volt Thermostatically Controlled Cabinet Heater | Forced-Air Hot Water Heater Using Engine Coolant for Mobile Use |
|----------|---|--|---|-------------------------------------|--|---|
| PWT 1600 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PWT 2000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Tandem Axle PWT Standard Pump Features

| Model | Insulated Mid-ship Mounted Cabinet c/w Pump, Reel & Hose & Right & Left Doors | 135 GPM Hydraulic Driven, Centrifugal Pump | 1 ½" Flexible Potable Water Hose c/w Full Flow Nozzle (100ft. length) | Electric Rewind Hose Reel c/w Brake | 1000 Watt, 110 Volt Thermostatically Controlled Cabinet Heater | Forced-Air Hot Water Heater Using Engine Coolant for Mobile Use |
|----------|---|--|---|-------------------------------------|--|---|
| PWT 2700 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PWT 3000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PWT 3600 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Measurements in charts are approximate.

Standard Tank Features:

- Constructed using ¼" thick carbon steel shell
- All seams welded, inside & out
- ¼" flanged & dished heads
- Baffled tank (ribbed & bolted) for increased load stability
- Tank interior sandblasted
- Interior of tank coated with food-grade liner
- 100' 1 ½" food-grade lined hose equipped with electric hose-reel
- Full length checker plate deck with raised rails
- 20" fill manway complete with interior ladder
- Heated and under slung cabinet for pump & reel (lockable)

- 4" rear dump valve
- LED/DOT approved lighting with 2 night service spot lights (all connections soldered)
- Exterior is sand-blasted, epoxy primed & powder coated standard white for long-term use
- Rear fill tower complete with ladder & overflow pipe
- Centrifugal 130 GPM stainless steel water pump
- Rear hose holder & deck access step
- Passenger side fluid level indicator
- Back-up alarm system (97 decibels)
- Front & rear mud flaps
- Rear pull hooks

Potable Water Tank Options:

- Spray bar
- Fire hydrant hook-up
- Flow meters
- Custom tank powder coat colours
- Heated Rear Valve



LED & DOT approved lighting



Rear fill tower



1½" Food-grade lined hose & electric reel

Single Axle PWT Series Specifications

| Model | Tank Capacity | | Tank Diameter | Tank Length | Front Axle Capacity | Rear Axle Capacity | Cab to Axle Length |
|----------|------------------|--------|---------------|-------------|---------------------|--------------------|--------------------|
| | Imperial Gallons | Litres | | | | | |
| PWT 1600 | 1,600 | 7,280 | 5' | 12' | 12,000 lbs. | 21,000 lbs. | 120' |
| PWT 2000 | 2,000 | 9,100 | 5' 6" | 12' | 12,000 lbs. | 23,000 lbs. | 120' |

Tandem Axle PWT Series Specifications

| Model | Tank Capacity | | Tank Diameter | Tank Length | Front Axle Capacity | Rear Axle Capacity | Cab to Axle Length |
|----------|------------------|--------|---------------|-------------|---------------------|--------------------|--------------------|
| | Imperial Gallons | Litres | | | | | |
| PWT 2700 | 2,700 | 12,429 | 6' | 14' | 14,000 lbs. | 40,000 lbs. | 128' |
| PWT 3000 | 3,200 | 14,682 | 6' | 16' | 16,000 lbs. | 40,000 lbs. | 154' |
| PWT 3600 | 3,600 | 16,560 | 6' 6" | 16' | 16,000 lbs. | 40,000 lbs. | 160' |

Measurements in charts are approximate.

Dedicated Parts & Service Department.

You'll find what you need for your operation from our wide selection of top quality products, including pumps, blowers and hoses at the most competitive prices available in Canada.

Specialty orders? Not a problem for our team.

Glendale Parts and Service is just a phone call away – 24 hours – 7 days a week.

Your customers depend on you. **You can depend on Glendale.**

© Glendale Industries Ltd. A Division of Atom-Jet Group.

w: **glendale**.atomjet.com

TF: (800) 573-5048

E: **parts**@atomjet.com